

High Voltage Power Supplies

PHV Series, 3.5 – 5 Watt

Features

- Compact high voltage power supplies
- Full SMD design with ceramic capacitors for highest reliability
- Positive or negative polarity models
- ◆ Excellent output stability
- Low temperature coefficient
- Ultra low ripple
- Remote voltage programming 0 to 100 %
- Short circuit protection
- Shielded metal case
- 3-year product warranty



The PHV series are regulated miniature high voltage power modules using SMD and hybrid technology. They are designed for PCB mounting. The use of high stability components guarantees a minimal temperature drift and a very stable output voltage. Typical applications for these HV power supplies are photomultiplier tubes, gas chromatography, analytical instruments and wherever where small size and high output voltage stability is requested.

| Models | | | |
|---------------------|---------------------|----------------|---------------------|
| Order code | Input voltage range | Output voltage | Output current max. |
| PHV 12-350 S 10 P | | 0+350 VDC | 10 mA |
| PHV 12-350 S 10 N | | 0350 VDC | 10 mA |
| PHV 12-0.5 K 1000 P | | 0+500 VDC | 10 mA |
| PHV 12-0.5 K 1000 N | 12 VDC | 0500 VDC | 10 mA |
| PHV 12-1.0 K 5000 P | 10.8 - 16.5 VDC | 0+1000 VDC | 5 mA |
| PHV 12-1.0 K 5000 N | | 01000 VDC | 5 mA |
| PHV 12-2.0 K 2500 P | | 0+2000 VDC | 2.5 mA |
| PHV 12-2.0 K 2500 N | | 02000 VDC | 2.5 mA |

Order code P for positive output polarity Order code N for negative output polarity




High Voltage Power Supplies PHV Series 3.5 – 5 Watt


| Input Specifications | | | |
|---|--|--|--|
| Input voltage | | +10.8 to +16.5 VDC | |
| Reserve voltage protection | | none | |
| Conducted noise (input) | | internal filter | |
| Output Specifications | 5 | | |
| Voltage set accuracy | | ±5 % | |
| Voltage adjustement range (adjustable with external volt | rage 0 to +6 VDC or with 5 kOhm variable resistor) | 0 – 100 % | |
| Remote On/Off control | | On = pin 2 to pin 5 open Off = pin 2 to pin 5 short | |
| Regulation | Input variation Vin min. to Vin max.Load variation 0–100% | 0.01 % max. 0.01 % max. | |
| Ripple and noise (20 MHz Bandwidth) | | 100 mVpk-pk typ. | |
| Temperature coefficient | | ±0.01 %/K | |
| Stability | | 0.05 % 8h after warm-up time | |
| Output current limitation | | 110 % of lout max., constant current | |
| Short circuit protection | | continuous | |
| General Specification | ns | | |
| Temperature ranges | OperatingCase temperatureStorage | -10°C to +75°C +90°C max. -25°C to +75°C | |
| Derating | | 4 %/K above 50°C | |
| Humidity (non condensing) | | 30 – 95 % rel H max. | |
| Efficiency | | 60 – 65 % | |
| Reliability, calculated MTBF | (MIL-HDBK-217F, at +25°C, ground benign) | >300′000 h | |
| Isolation (Input/Output) | - Voltage | none | |
| Switching frequency | | 90 kHz typ. (fixed) | |
| Vibration | | 5 – 10 Hz amplitude 10 mm pk-pk 10 – 55 Hz acceleration 2 G | |
| Thermal shock | | acceleration 20 G max. time 11 ms. | |
| Environmental compliance | – Reach – RoHS | www.tracopower.com/products/phv-reach.pdf RoHS directive 2011/65/EU | |
| Physical Specification | ns | | |
| Casing material | | Steel chrome-nickel plated | |
| Weight | | 65 g (2.29 oz) | |
| Soldering temperature | | max. 260°C / 10 sec. | |

All specifications valid at nominal input voltage, full load and $\pm 25^{\circ}\text{C}$ after warm-up time unless otherwise stated.


Connection Diagram


Connection for remote control by variable resistor

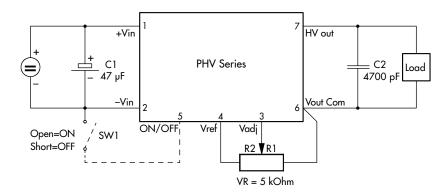




Connection for remote control voltage control

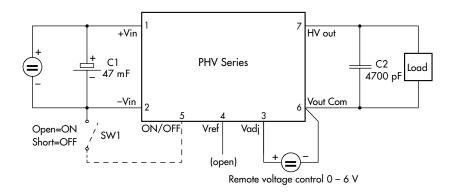



Outline Dimensions


PHV 12-350 S 10P /N:

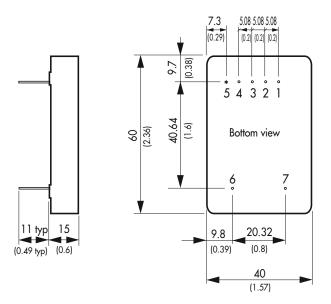

| Pin-Out | | |
|---------|------------|--|
| Pin | | |
| 1 | +Vin (Vcc) | |
| 2 | -Vin (GND) | |
| 3 | V adj. | |
| 4 | V ref. | |
| 5 | ON/OFF* | |
| 6 | Common | |
| 7 | Vout | |

*on request: add suffix RC

all other models:

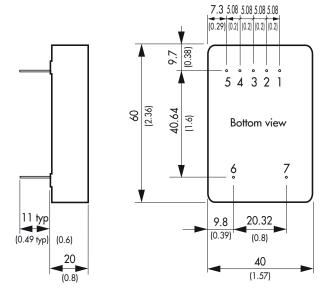

Dimensions in [mm], () = lnch

Pin diameter: $0.8 \pm 0.05 (0.03 \pm 0.002)$

Tolerances: $\pm 0.5 (\pm 0.02)$